

## Filtertanks rubberlined – ebonite

**RUBBER-LINED** steel pressure filters with filterstar or nozzle-plates

Our hardrubber-qualities are highquality universal linings ebonite with excellent chemical resistance.


This liningqualities have been applicated in process- and filtertanks where chemical attack of steelwork occurs by aggressive acids and alkalis under pressure.

Practice has been proven very long life-times under moderate severe conditions, for example 30% Hydrocloric acid.

Food grade quality up to 80°C Depending on medium max.100°C Potable water applications max.80°C.
















## **RUBBER-LINED** steel tanks

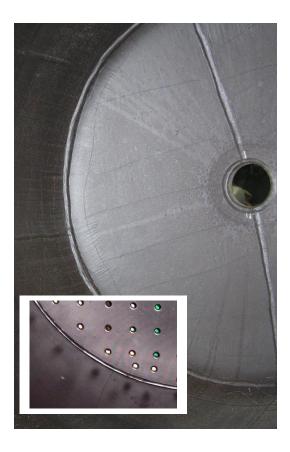

## Filternozzles:

- Slotsize from 0.2 to 2.0 mm
- With safety-nut and safety-gasket
- Mat. PP max. 60°C (standard) Other options:
- Mat. PPGV30S max 110°C
- Mat. PVDF max.135°C
- Mat. Stainless steel

